TENT COOPERATION TREATY

PCT

14 REC'D 1 9 NOV 2001

INTERNATIONAL PRELIMINARY EXAMINATION REPORTS (PCT Article 36 and Rule 70)

See Notification of Transmittal of International Applicant's or agent's file reference Preliminary Examination Report (Form PCT/IPEA/416) FOR FURTHER ACTION P1439-100 Priority date (day/month/year) International filing date (day/month/year) International application No. 10.09.1999 06.09.2000 PCT/SE00/01709 International Patent Classification (IPC) or national classification and IPC7 D 21 B 1/14

olicant ORA KOPPARBERGS BERGSLAGS AB (publ) et al
This report is also accompanied by ANNEXES, i.e., she been amended and are the basis for this report and/or sh (see Rule 70.16 and Section 607 of the Administrative I	ets of the description, claims and/or drawings which have ests containing rectifications made before this Authority
These annexes consist of a total of 2 sheets.	
I Basis of the report II Priority III Non-establishment of opinion with regard to now IV Lack of unity of invention V Reasoned statement under Article 35(2) with regitations and explanations supporting such states VI Certain documents cited VII Certain defects in the international application VIII Certain observations on the international applic	velty, inventive step and industrial applicability gard to novelty, inventive step or industrial applicability; ment
Date of submission of the demand	Date of completion of this report
15.03.2001	04.09.2001
Name and mailing address of the IPEA/SE Patent- och registreringsverket BOX 5055 S-102 42 STOCKHOLM Facsimile No. 08-667 72 88	Authorized officer Wiva Asplund/ELY Telephone No. 08-782 25 00

Inter	nal application No.
PCT7	SE00/01709

I.	Basis	of the r	report
			the elements of the international application:*
١.		the inter	rnational application as originally filed
	\mathbb{R}	the desc	
		nages	1-11 , filed with the demand
l		pages	The state of
		pages	, filed with the letter of
	\boxtimes	the clai	ims: , as originally filed
1		pages	ex amended (together with any statement) under article 19
1		pages	, as amended (together the demand , filed with the demand
		pages	15-17 , filed with the letter of
1	\overline{C}		· · · · · · · · · · · · · · · · · · ·
1	\boxtimes	the dra	awings: , as originally filed $1-8$, filed with the demand
1		nages	1-8 , filed with the demand
		pages	, filed with the letter of
		the se	quence listing part of the description: , as originally filed
1	<u> </u>	pages	, filed with the demand
1		pages	, filed with the letter of, filed with the letter of
1		pages	S, x
	2. With the The	internati	to the language, all the elements marked above were available or furnished to this Authority in the language in which is application was filed, unless otherwise indicated under this item. which is: anguage of a translation furnished for the purposes of international search (under Rule 23.1(b)).
			. 11 - 41 - 10 (under Pule AX 1(D)).
1		the la	anguage of publication of the international application (under Rule 40.3(e)). anguage of the translation furnished for the purposes of international preliminary examination (under Rules 55.2 and/
		$\frac{1}{\text{or } 55}$	anguage of the translation furnished to the party.
	3. Wi	ith regard	d to any nucleotide and/or amino acid sequence disclosed in the international application, the international
1	Γ	☐ cont	gained in the international application in written form.
1	F	filed	d together with the international application in computer readable form.
	۲	⊨ նատ	hished subsequently to this Authority in written form.
- 1	F		to the imporphise form.
		The inte	e statement that the subsequently furnished written sequence listing does not go beyond and a control of the control of the subsequence listing has been furnished. The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.
	4.	The	e amendments have resulted in the cancellation of:
			the description, pages
		F	the claims, Nos.
		F	7
	5.		his report has been established as if (some of) the amendments had not been made, since they have been considered to go his report has been established as if (some of) the amendmental Box (Rule 70.2 (c)).**
	4	Replaces in this re	ment sheets which have been furnished to the receiving Office in response to an invitation under Afficie 14 are eport as "originally filed" and are annexed to this report since they do not contain amendments (Rules 70.16
			17). lacement sheet containing such amendments must be referred to under item I and annexed to this report.

	Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability;
V.	Reasoned statement under Article 55(2) meaning such statement citations and explanations supporting such statement
	citations and explanations supporting sees the second seco

Statement			YES
Novelty (N)	Claims Claims	1-13	NO
Inventive step (IS)	Claims Claims	1-13	YES NO
Industrial applicability (IA)	Claims Claims	1-13	YES NO

2. Citations and explanations (Rule 70.7)

The valid claims are the amended claims of December 21, 2000 (amended under PCT Article 19)

Cited US 4731160 A discloses a method for the bleaching of mechanical pulp. The pulp from a refiner is separated into a fines fraction and a fibre fraction. The fibre fraction is mixed with hydrogen peroxide and subjected to displacement bleaching. The fines fraction is mixed with hydrogen peroxide and subjected to non-displacement bleaching. After bleaching, the fines and fibre streams can be recombined before passage to a paper product production machine.

Unlike what is known from the cited document, claim 1 discloses that the primary fines are led away from the pulp production. The fines contain relatively large amounts of extractives and manganese, which are consequently removed from the fibre fraction. This produces a pulp having a low density with good strength properties.

Therefore, the claimed invention is novel, is considered to involve an inventive step and have industrial applicability.


CLAIMS

5

15

25

- 1. Method in connection with the production of mechanical pulp from a cellulose containing material, wherein the material is processed in at least one refining step to produce pulp and wherein the pulp is fractionated (4), after a first refining step (1), in order to separate primary fines (5) from the pulp, characterised in that said separated primary fines (5) are led away from the pulp production.
- 2. Method according to claim 1, characterised in that said first refining step (1) is adapted to achieve a high freeness in the pulp, preferably at least 500 ml CSF, and even more preferred 600-800 ml CSF, and to yield a primary fines content of 3-10 15 %, preferably 5-10 %, in the pulp.
 - 3. Method according to claim 1 or 2, characterised in that at least a part of said pulp is processed in a second refining step (10, 13), preferably after said fractionation (4), whereby secondary fines are produced in the pulp.
- 4. Method according to any of the preceding claims, characterised in that said pulp is subjected to a treatment step (2) after said first refining step (1), but before said fractionation (4), in which treatment step (2) the pulp is subjected to one or more of the treatments dilution, temperature enhancement, mechanical agitation and 20 retention time.
 - 5. Method according to any of the preceding claims, characterised in that said fractionation (4) is performed by screening, preferably in at least one curved screen, or by centrifugation, preferably in at least one cyclone.
 - 6. Method according to any of the preceding claims, characterised in that said fractionation (4) is performed in at least two steps.
- 7. Method according to any of the preceding claims, characterised in that 3-30 15 %, preferably 5-10 % of said pulp, measured as dry weight, is separated from said pulp in said fractionation (4).
- 8. Method according to any of the preceding claims, characterised in that said separated, led away primary fines (5) are used for heat recovery, for cattle-food or in 35 another line for pulp, paper or paperboard production.



- 9. Method according to any of the preceding claims, characterised in that the pulp is subjected to bleaching, preferably peroxide bleaching, after the refining (1, 13) and fractionation steps (4).
- 5 10. Method according to any of the preceding claims, characterised in that said pulp is CTMP, CMP, TMP or HTCTMP.
 - 11. Method according to any of the preceding claims, c h a r a c t e r i s e d i n that said produced mechanical pulp is used in the production of paperboard, preferably paperboard intended for food or liquid related applications.

- 12. Mechanical pulp from a cellulose containing material, characterised in that it is produced according to any of claims 1-11.
- 13. Paperboard, at least partly produced from a mechanical pulp from a cellulose containing material, c h a r a c t e r i s e d i n that said pulp is produced according to any of claims 1-11.

PATENT COOPERATION TREATY

From the INTERNATIONAL BUREAU

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

To:

Commissioner
US Department of Commerce
United States Patent and Trademark
Office, PCT
2011 South Clark Place Room
CP2/5C24
Arlington, VA 22202

Date of mailing (day/month/year)
29 May 2001 (29.05.01)

International application No.
PCT/SE00/01709

International filing date (day/month/year)
06 September 2000 (06.09.00)

ETATS-UNIS D'AMERIQUE
in its capacity as elected Office

Applicant's or agent's file reference
P1439-100

Priority date (day/month/year)
10 September 1999 (10.09.99)

Applicant
MOBERG, Anders et al
The designated Office is hereby notified of its election made: X in the demand filed with the International Preliminary Examining Authority on:
15 March 2001 (15.03.01)
in a notice effecting later election filed with the International Bureau on:
2. The election X was was not was not made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland

Authorized officer

Claudio Borton

Telephone No.: (41-22) 338.83.38

l application No. PCT/SE 00/01709

A. CLASSIFICATION OF SUBJECT MATTER		-
IPC7: D21B 1/14 According to International Patent Classification (IPC) or to both national	al classification and IPC	
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by class	sification symbols)	
IPC7: D21B Documentation searched other than minimum documentation to the extension of the	ent that such documents are included in	the fields searched
SE,DK,FI,NO classes as above.	day have and where practicable, search	terms used)
Electronic data base consulted during the international search (name of	data once and, where the	
<u>.</u>		·
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category* Citation of document, with indication, where appropriate the company of	priate, of the relevant passages	Relevant to claim No.
X US 4731160 A (J. ROBERT PROUGH ET 15 March 1988 (15.03.88), column 1 line 55 - line 60, claim 1	AL),	1,5,6,9
Further documents are listed in the continuation of Box		terrational filing date or priority
* Special categories of cited documents: "A" document defining the general state of the art which is not considered	"T" later document published after the i date and not in conflict with the ap the principle or theory underlying the	ne invention
to be of particular relevance "E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance: the considered novel or cannot be consistent when the document is taken all	
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance: t	he claimed invention cannot be
"O" document referring to an oral disclosure, use, exhibition or other	being obvious to a person skilled in	the art
"P" document published prior to the international filing date but later than the priority date claimed	*& document member of the same pat Date of mailing of the international	
Date of the actual completion of the international search	0 8 -01- 2001	a bear on a sp
2 January 2001 Name and mailing address of the ISA/	Authorized officer	
Swedish Patent Office		
Box 5055, S-102 42 STOCKHOLM	Wiva Asplund/MP Telephone No. + 46 8 782 25 0	0
Facsimile No. +46 8 666 02 86	<u> </u>	

INTERNATIONAL ARCH REPORT Information on patent family members

04/12/00

International application No.

PCT/SE 00/01709

Patent document cited in search report		Publication date	Patent family member(s)	Publication date	
US	4731160 A	15/03/88	NONE	o na	

(19) World Intellectual Property Organization International Bureau





(43) International Publication Date 22 March 2001 (22.03.2001)

PCT

(10) International Publication Number WO 01/20074 A1

(51) International Patent Classification?:

(21) International Application Number:

PCT/SE00/01709

D21B 1/14

(22) International Filing Date:

6 September 2000 (06.09.2000)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

9903215-3

10 September 1999 (10.09.1999)

(71) Applicant (for all designated States except US): STORA **AKTIEBOLAG** KOPPARBERGS **BERGSLAGS** (Publ) [SE/SE]; Åsgatan 22, S-791 80 Falun (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): MOBERG, Anders [SE/SE]; Lagmansvägen 2, S-663 41 Hammarö (SE). PENG, Frank [SE/SE]; Värmlandsgatan 11, S-652 22 Karlstad (SE). FREDLUND, Mats [SE/SE]; Edebäcksgatan 43A, S-654 61 Karlstad (SE).

(74) Agents: HYNELL, Magnus et al.; Hynell Patenttjänst AB, Patron Carls väg 2, S-683 40 Hagfors/Uddeholm (SE).

(81) Designated States (national): AE, AG, AL, AM, AT, AT


- (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KR (utility model), KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:


With international search report.

[Continued on next page]

(54) Title: METHOD IN CONNECTION WITH THE PRODUCTION OF MECHANICAL PULP

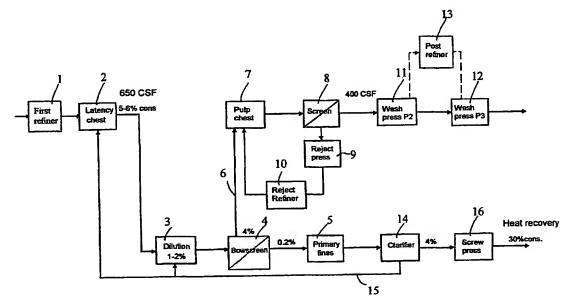

(57) Abstract: A method in connection with the production of mechanical pulp from a cellulose containing material, wherein the material is processed in at least one refining step to produce pulp. According to the invention, the pulp is fractionated (4), after a first refining step (1), in order to separate primary fines (5) from the pulp. The invention also relates to a mechanical pulp, produced by the method, and to a paperboard, which at least partly consists of such mechanical pulp.





 Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

METHOD IN CONNECTION WITH THE PRODUCTION OF MECHANICAL PULP

TECHNICAL FIELD

The present invention relates to a method in connection with the production of mechanical pulp from a cellulose containing material, wherein the material is processed in at least one refining step to produce pulp. The invention also relates to a mechanical pulp, produced by the method, and a paperboard, at least partly consisting of such mechanical pulp.

10 BACKGROUND OF THE INVENTION

Mechanical pulp, most often CTMP (Chemi Thermo Mechanical Pulp), is a major component in multiply board constructions, and often constitutes about 70% of the centre layer and up to 50% of the board furnish.

To achieve high bending stiffness of the board it is desirable to have a high strength at a sheet density of the centre ply as low as possible. A favourable Scott bond - density relationship is thus essential. To this end, there are two opposing aspects that have to be considered. Firstly, only the components of the raw material which contribute to strength and bulk are desirable to have in the refined pulp. The other components, which do not contribute to strength and bulk in any extent, basically constitutes a load in the system, and require additional drying capacity, bleaching agent consumption, etc. On the other hand, every component that remain in the pulp will contribute to a high yield in the production. One of the aspects that renders mechanical pulp competitive in relation to chemical pulp, is the higher yield of mechanical pulp.

Another important aspect of the mechanical pulp is the taint and odour properties, which are directly related to the extractives and manganese left in the pulp. The taint and odour properties are especially important when the pulp is to be used in paperboard for food or liquid related applications. This is true for all types of mechanical pulp. For TMP

(Thermo Mechanical Pulp), the taint and odour problem is so serious that this type of pulp is not used in paperboard today. If the pulp is to be bleached with non-chlorine bleaching agents, especially peroxide containing bleaching agents, the remaining manganese content in the pulp constitutes a problem, which results in a higher consumption of bleaching agents and an increased need for complexing agents, such as EDTA or

DTPA, in order to reach a desired brightness level. Also, a remaining extractives content in the pulp results in a high washing demand, and increased contamination of the

35 DTPA, in order to reach a desired brightness level. Also, a remaining extractives content in the pulp results in a high washing demand, and increased contamination of the water system and the effluents from the mill.

10

20

It has been shown in laboratory studies for bleached kraft pulps that primary fines have detrimental effects on the bleachability of the pulp, "Bäckström, M., Htun M.: Improved Bleachability Without Primary Fines, 1998 International Pulp Bleaching Conference, Proceedings Book 2, pp333-336". Similar results on the bleachability of kraft pulp have been reported in a study on the effects of ray cells, "Westermark, U., Capretti, G.: Influence of Ray Cells on The Bleachability and Properties of CTMP and Kraft Pulps, Nordic Pulp & Paper Res. J. 3(1988) 2, pp95-99". In the latter reference, the effect of ray cells in mechanical pulps has also been studied. It was concluded that no significant difference in bleachability for CTMP pulp with and without ray cells, respectively, could be detected. As to the contribution of ray cells on strength and bonding properties of CTMP and TMP pulp, it was concluded that an addition to the pulp of a ray cell fraction, resulted in poor bonding and strength properties.

In "Rydholm, S.A.: Pulping Processes, Interscience, New York (1965), p744", it has been suggested to use specially designed so called ray cell filters for the separation of resin containing ray cells in the sulphite pulp industry.

For mechanical pulps however, no industrial process has been designated to address the problems related to primary fines, which problems are specific for mechanical pulps, i.e. problems with taint, odour, strength and bulk. Neither has a coarse pulp fraction, free from primary fines, been treated to attain improved pulp properties for the production of paper or paperboard.

DESCRIPTION OF THE INVENTION

- It is an object of the present invention to provide a method in connection with the production of mechanical pulp, which will yield a pulp having a low density, i.e. a high bulk, and still good strength properties, especially measured in the z-direction, e.g. as Scott bond, and which in the same time is low in extractives and manganese content.
- To this end, there is presented a method according to claim 1. Thus, the object of the invention is attained by fractionating the pulp, after a first refining step, in order to separate primary fines from the pulp.
- In the development of pulp strength, fines material is produced and contributes to bonding of fibres and consolidation of the paper sheet. The primary fines, mainly consisting of middle lamella fragments and materials originated from the parenchyma cells, contain high amounts of lignin and extractives. Generally the primary fines are defined as

10

15

30

fines produced in the first refining step, in the production of mechanical pulp. They have a size of <200 mesh according to Bauer McNett. Primary fines contribute less to pulp strength compared to secondary fines which are produced from the secondary fibre wall as fibrils in the latter stages of the refining process, i.e. the post refining. The secondary fines have about the same size as the primary fines, but are, as just stated, produced in connection with the post refining. The contents of DCM extractives and transition metals in the primary fines are several times higher than in the whole pulp.

By fractionating the pulp after the first refining step, the primary fines, which accordingly contribute very little to strength and bulk, and contain relatively large amounts of extractives and manganese, can be separated from the pulp. The pulp is subsequently exposed to post refining, in a second refining step with or without reject screening, whereby strength contributing secondary fines are produced in the pulp. It should be clarified that in this context, a first refining step is defined as a refining step which yields primary fines, mainly consisting of middle lamella fragments and materials originated from the parenchyma cells, containing high amounts of lignin and extractives. This would mean that also two physically differing refining steps in series, which are operated to yield primary fines, would be considered as being one first refining step.

According to one aspect of the invention, the first refining step is adapted to achieve a high freeness in the pulp, preferably at least 500 ml CSF, and even more preferred 600-800 ml CSF, and to yield a primary fines content of 3-15 %, preferably 5-10 %, in the pulp. Preferably, the fractionation is effected by screening in any type of suitable screen, preferably in at least one curved screen. It could also be conceived to centrifuge the pulp, preferably in at least one cyclone. The fractionation may also be performed in at least two steps. Suitably, the pulp is diluted, to about 1-4 % dry solids, preferably 1-2 % before the fractionation.

According to another aspect of the invention, 3-15 %, preferably 5-10 % of said pulp, measured as dry weight, is separated from the pulp in the fractionation. The extent to which primary fines are separated from the pulp, depends on the desired end product. The primary fines, which are separated accordingly, are led away from said pulp production.

According to yet another aspect of the invention, the pulp is subjected to a treatment step after said first refining step, but before said fractionation, in which treatment step the pulp is subjected to one or more of the treatments including dilution, temperature

15

20

25

30

35

enhancement, and mechanical agitation in a certain retention time. This may be performed in a so called latency chest or any type of retention vessel. Basically, the object of such a treatment step is to allow the fibres to straighten up after the first refining step.

After the refining and fractionation steps, the pulp may be subjected to bleaching, preferably peroxide bleaching. All types of peroxide containing bleaching agents may be used, but hydrogen peroxide is especially preferred.

The cellulose containing raw material for the process may be either any type of wood species, such as hardwood or softwood, or any type of non-wood species, e.g. bagasse, straw etc. The type of process used for the production of mechanical pulp may be CTMP, CMP, TMP or HTCTMP (High Temperature CTMP). The mechanical pulp, which is produced in the method, is preferably used in the production of paperboard, most preferably paperboard intended for food and liquid related applications, such as food or liquid containers, etc.

The invention also relates to mechanical pulp from a cellulose containing material, which pulp is produced by the method, and to paperboard, at least partly produced from such mechanical pulp.

By the method, there may be attained a bulk which is at least 5 %, and up to 20%, preferably 10-15 %, higher than a reference pulp, which has not been exposed to fractionation, at a given strength. At the same time, the extractives and manganese content may be lowered with about 50 % in relation to the reference pulp. Consequently, the taint and odour properties of the pulp, measured as hexanal level after 10-30 days, is lowered with up to 80-90 %. For TMP pulp, the reduction in extractives, and consequently in hexanal level, is especially interesting, creating a possibility to use TMP pulp in applications, such as food and liquid related paperboard, where it has not been possible to use it before, due to its poor taint and odour properties.

As a consequence of the higher bulk at a given strength, the basis weight of board can be reduced due to less required pulp in the centre ply. The higher bulk balances, to a certain degree, the yield loss that the removal of primary fines will give. The yield loss may also be kept on a low level with a more selective fractionation, if the first refining step is operated to yield less fines.

20

30

35

The environmental aspect of a system according to the invention can be addressed in two ways. Firstly, the water system will become cleaner due to the removal of primary fines that contains large amount of extractives at an early stage of the process. At the same time the washing demand is reduced. This results in less and cleaner effluent from the pulp mill. Secondary, the demand of chelating/complexing agent (EDTA or DTPA) will be expectedly lower, both in washing and in bleaching, due to the lower manganese content remaining in the fractionated pulp. This reduces the impact of chelating agent on the environment.

On the other hand, the environmental benefits can be realised only if the primary fines containing water flow is handled properly. A technically feasible way is to thicken the fines material, with commercially available equipment. The thickened fines may be sent back to the existing energy recovery system for heat generation, or be used for cattle-food or in another line for pulp, paper or paperboard production, or be disposed of as solid waste.

The chemical savings from primary fines removal are substantial. The DTPA charge, usually 2-2.5 kg/t, could be cut by up to 50%, i.e. to 1-1.3 kg/t, calculated on the chelating need in both washing and bleaching. Also, a lower consumption of peroxide and caustic is required at the same brightness. The brightness maximum without DTPA will also be much higher for the primary fines fractionated pulp, which is interesting in case there will come legislative restrictions for the use of chelating agents in the future.

BRIEF DESCRIPTION OF THE FIGURES

- In the following, the invention and an example, will be described, referring to the figures, of which:
 - Fig. 1 is showing a flow scheme of a preferred embodiment of the invention,
 - Fig. 2 is showing a flow scheme for comparative tests,
 - Fig. 3 is a diagram showing freeness vs. refining energy for a post refined pulp according to the invention and a reference pulp,
 - Fig.4 is a diagram showing Scott Bond vs. freeness for the pulps of Fig. 3,
 - Fig. 5 is a diagram showing Scott Bond vs. density for the pulps of Fig. 3, and also for the corresponding pulps before post refining,
 - Fig. 6 is a diagram showing tensile stiffness index vs. density for the pulps of Fig. 3, and also for the corresponding pulps before post refining,
 - Fig. 7 is a diagram showing air permeance vs. density for the pulps of Fig. 3, and also for the corresponding pulps before post refining,

Fig. 8 is a diagram showing brightness vs. peroxide charge, with and without charge of chelating agent, for the pulps of Fig. 3

DESCRIPTION OF THE DRAWINGS

The method according to the invention is described in connection with Fig. 1. Before refining, the cellulose containing raw material is possibly pretreated in a conventional way, depending on the type of pulp which is being produced, i.e. with heat and/or chemicals. Thereafter, the raw material is subjected to a first refining step, in the first (primary) refiner 1. The first refining step is operated to yield a high freeness, about 650 ml CSF, in the pulp which is produced. In a subsequent treatment step 2, in a so called latency chest, the fibres are allowed to straighten up during a certain retention time, and under influence of dilution, heating and mechanical agitation. The pulp leaving the treatment step 2 has a consistency of about 5-6 % and is further diluted 3 to about 1-2 %, before being subjected to fractionation 4.

15

20

25

30

35

In the fractionation step 4, up to 15 % of the pulp fibres are separated from the pulp stream as primary fines 5, i.e. the fraction <200 mesh according to Bauer McNett. In the preferred embodiment there is used one or more curved screens in the fractionation step. The remaining part 6 of the pulp, having a consistency of about 4 %, is led on in the process, as is conventional, through a pulp chest 7 and further to a screening step 8 for separation of coarse material. The reject in the screening 8 of coarse material is thickened in a press 9 and subjected to a refining step in a reject refiner 10 which also functions as a second refining step, and is subsequently recirculated back to the pulp stream, upflow the screening 8 of coarse material. The accept in the screening 8 of coarse material is dewatered and washed in one or more wash presses 11, 12, to a consistency of about 20-30 %. An additional refining step 13, or post refining, can also be performed, preferably between the wash presses 11 and 12. Both secondary refining and post refining can be performed at HC (high consistency) or MC (medium consistency) or LC (low consistency), and with different types of refining equipments, for instance disk refiner or conical refiner. The second refining step and optional post refining is operated to yield secondary fines, which contribute to the strength of the pulp.

After the final wash step 11, 12, the pulp is preferably subjected to bleaching, preferably non-chlorine bleaching and most preferably peroxide bleaching, with or without the addition of a chelating/complexing agent, such as DTPA or EDTA.

The primary fines 5, which are separated in the fractionation step 4, having a consistency of about 0,1-1 %, are being dewatered/clarified 14, the filtrate 15 being returned to the process, preferably to the dilution step 3 upflow the fractionation, and/or to the treatment step 2. After the dewatering 14, the primary fines, having a consistency of about 4 %, are further dewatered, e.g. in a screw press 16, to about 30 %, whereafter the primary fines are led to heat recovery or for other use.

EXAMPLE

Fractionation of CTMP pulp

Fractionation trials were carried out on CTMP pulp, which had been refined in a first refining step, using a set-up of curved screen with screen slit width 100 μm, at varied pulp consistency, inlet clearance, flow rate and hydraulic pressure (see Figure 2). The removal of fines varied from 4.8% to 8.5%, as shown in Table 1. Pulp BSK 4, being the reject from the curved screen, with the highest fines removal was chosen for further studies.

Table 1. Curved screen fractionation

	Bowscree	en setting	P	Process parameters			
	Slit width Clearance um mm		Flow	Pressure	Consistency	removal	
			l/min	kPa	%	%	
BSK 1	100	3	1350	100	2.0	4.8	
BSK 2	100	3	1890	200	2.0	5.9	
BSK 3	100	2	900	100	1.1	7.8	
BSK 4	100	100 2		200	1.1	8.5	

20 Table 2. Bauer McNett fractionation of CTMP pulp

		Whole Pulp					
	>16 mesh >30 >100 >200 <200					Mn	Freeness
	%	%	%	%	%	ppm	CSF
Primary	49.2	18.5	13	3.9	12.0	25	590
BSK 4	53.6	19.8	14	4.1	8.2	13	650
Reference	47.9	19.9	14	4.3	13.5	18	390
Ultra-CTMP	47.6	20	15	4.1	13.3	11	390

When comparing the incoming pulp (Primary), with the fractionated pulp (BSK 4), the long fibre fraction (>16 mesh) has increased from 49.2% to 53.6%, due to the fractionation. This in combination with a decreased fines content, from 12% to 8.2%, resulted in an increase in freeness, from 590 ml to 650 ml (see Table 2).

5

10

25

30

35

Post-refining of fractionated CTMP

According to Figure 2, the fractionated pulp and a reference pulp were refined in a second refining step, in order to study the strength development. Here, "Ultra CTMP" refers to the BSK 4 pulp, after dewatering and post refining (i.e. second refining step) and "Reference" refers to the Primary pulp, after dilution, dewatering and post refining. The trial was done with a 20 inch atmospheric refiner. The refining conditions were: refining consistency 21% (for the reference pulp) and 24% (for the fractionated); disc clearance 0.7-2.0 mm; rotational speed 1500 rpm and production rate about 60 kg/h.

As shown in Figure 3, freeness of both pulps decreased in a similar pattern with refining energy. The fractionated, post refined pulp (Ultra-CTMP) required about 200 kWh/t more energy to reach the same freeness level, due to the loss of primary fines during the fractionation. Interestingly, both Ultra-CTMP and the reference pulp (Reference) have very much the same Bauer McNett profile after the second refining step, regarding both long fiber and fines content (see Table2).

Pulp Properties

Physical properties

The physical properties of the Ultra CTMP and the Reference were tested on 150 g/m² sheets in order to have a good retention of fines (no white water circulation in sheet-forming).

When compared at standard pressing conditions (400 kPa) the Ultra-CTMP had comparably higher Scott bond at given freeness, see Figure 4. Regarding other physical properties, such as tensile strength and tensile stiffness index, there were no significant differences when comparing at equal freeness.

What is more interesting, however, is the strength-density relationship of the resulting pulp. In order to further evaluate this, sheets were made with different wet pressing pressure and tested for the pulps both before and after post refining to 390 ml CSF (which is the approximate freeness level for centre layer CTMP).

The superior Scott bond - density relationship of Ultra-CTMP was maintained at the three different pressure levels, see Figure 5. Scott bond increased with increased pressing pressure for both pulps, though the Ultra-CTMP appeared to be more resistant toward wet pressing, showing lower sheet density at the same freeness and press pressure.

At a Scott bond of 72 J/m², which is a normal value for CTMP for paperboard production, the density was reduced from approx. 350 kg/m³ to 300 kg/m³, an improvement by 13%.

Figure 6 shows that the post refined Ultra-CTMP also had about 13 % lower density when compared at tensile stiffness index 3.7 kNm/g, which is a normal value for CTMP for paperboard production. With increased wet pressing pressure the tensile stiffness of the reference got closer to the Ultra CTMP but at this high pressure the bulk loss became more severe.

Before post refining, the fractionated Ultra-CTMP had a poorer tensile stiffness - density relationship, probably because of the higher pulp freeness as a result of the fines removal.

The air permeance at given density was also higher for the Ultra CTMP than for the reference, both before and after post refining, see Figure 7.

The physical testing of the post refined pulps clearly showed that the Ultra CTMP had a more open and bulky structure at a given tensile stiffness and Scott bond. The improved properties resulted in an increase in bulk by about 13% at comparable Scott bond and tensile stiffness, from 2.9 (density 350 kg/m³) to 3.3 (density 300 kg/m³). The bulkier structure should give higher bending stiffness and also easier drying on the board machine.

Peroxide bleaching

25

The post-refined fractionated pulp, having a freeness of 390 ml, was bleached with peroxide to evaluate the bleachability. In comparison, the reference pulp (Reference), refined to the same freeness, was also bleached.

As shown in Figure 8, the bleaching response was better for Ultra CTMP at all peroxide levels. The difference was less significant without DTPA addition in the bleaching. This is likely explained by the higher manganese content in the reference pulp, 18 ppm compared to 11 ppm in Ultra-CTMP (Table 2). With DTPA addition in bleaching the

bleaching response was improved for both pulps and the difference in bleaching response of the pulps was also reduced.

Taint and odour properties in relation to chemical composition

The chemical composition of fractionated (Ultra CTMP) and reference (Reference)

CTMP pulp was measured using acid hydrolysis followed by sugar analysis. The partial removal of primary fines in curved screen reduced the lignin content in the remaining fines as well as in the whole pulp, Table 3. As secondary fines contained less lignin, the fines after post refining contained less lignin and more cellulose. The difference was much more pronounced for the Ultra CTMP, due to the removal of the lignin-enriched primary fines.

Table 3. Chemical composition of CTMP and fines

		Whole Pul	p	Fines (<200 mesh)			
	Glucose	ducose Tot sugar Lignin		Glucose	Tot sugar	Lignin	
	%	%	%	%	%	%	
Ref CTMP (primary)	46.2	67	27.00	32.8	54.3	37.9	
Fractionated CTMP	47.1	68.4	26.20	34.3	56.8	36.5	
Ref CTMP (post refined)				33.3	54.8	37.7	
Ultra CTMP (post refined)				36.9	59.4	35.2	

15 Table 4. Hexanal analysis and extractive content

	Aceton	Unsaturat.	Unsat. tri-	Unsat. steryl	Resin	Mn	Hexanal	Hexanal
	extract	fatty acids	glycerides	esters	acids		10 days	30 days
	%	mg/g	mg/g	mg/g	mg/g	ppm		
Ref CTMP	0.45	0.25	1.25	0.5	0.55	18	90	955
Ultra-CTMP	0.21	0.05	0.3	_ 0.2	0.15	11	15	55
Mill CTMP*								
- 2 stage	0.63	0.17	2.4	0.5	0.3			250
- 3 stage	0.37	0.09	1.4	0.3	0.1	<2	12**	45

^{*} Mill CTMP

20

As shown in Table 4, the extractives content (acetone content) in the Ultra CTMP was 50% lower than in the Reference CTMP. The reduction in unsaturated acids/esters was even more radical. The explanation could be that as extractives are generally enriched in materials originated from middle lamella and parenchyma cells surrounding ray cells and resin channels, both represented in primary fines, removal of primary fines naturally results in a decrease in the extractives content. Furthermore, as transition metals, espe-

^{** 6-8} days.

cially manganese, tend to locate also preferentially in the middle lamella and parenchyma cells, removal of primary fines leads to reduction of manganese content. Consequently, the taint and odour properties of pulp, here measured as hexanal value after 10 respectively 30 days, were ca 80-90% lower for the fractionated Ultra-CTMP. Although the pulps compared in this study were not washed as thoroughly as in the mill (Figure 2), the taint and odour properties of Ultra-CTMP were comparable to those of the fully washed mill CTMP (-3 stage). The large difference between Ultra-CTMP and the reference CTMP deserves special notification, indicating the potential that can be achieved by primary fines removal.

10

5

The invention is not limited by the above described embodiment and example, but may be varied within the scope of the claims.

CLAIMS

5


10


25


- 1. Method in connection with the production of mechanical pulp from a cellulose containing material, wherein the material is processed in at least one refining step to produce pulp, c h a r a c t e r i s e d i n that the pulp is fractionated (4), after a first refining step (1), in order to separate primary fines (5) from the pulp.
- 2. Method according to claim 1, c h a r a c t e r i s e d i n that said first refining step (1) is adapted to achieve a high freeness in the pulp, preferably at least 500 ml CSF, and even more preferred 600-800 ml CSF, and to yield a primary fines content of 3-15 %, preferably 5-10 %, in the pulp.
- 3. Method according to claim 1 or 2, c h a r a c t e r i s e d i n that at least a part of said pulp is processed in a second refining step (10, 13), preferably after said fractionation (4), whereby secondary fines are produced in the pulp.
- Method according to any of the preceding claims, characterised in that said pulp is subjected to a treatment step (2) after said first refining step (1), but before said fractionation (4), in which treatment step (2) the pulp is subjected to one or more of the treatments dilution, temperature enhancement, mechanical agitation and retention time.
 - 5. Method according to any of the preceding claims, characterised in that said fractionation (4) is performed by screening, preferably in at least one curved screen, or by centrifugation, preferably in at least one cyclone.
 - 6. Method according to any of the preceding claims, characterised in that said fractionation (4) is performed in at least two steps.
- 7. Method according to any of the preceding claims, characterised in that 315 %, preferably 5-10 % of said pulp, measured as dry weight, is separated from said pulp in said fractionation (4).
- 8. Method according to any of the preceding claims, characterised in that said separated primary fines (5) are led away from said pulp production, and are used for heat recovery, for cattle-food or in another line for pulp, paper or paperboard production.

PCT/SE00/01709


- Method according to any of the preceding claims, c h a r a c t e r i s e d i n that the pulp is subjected to bleaching, preferably peroxide bleaching, after the refining (1, 13) and fractionation steps (4).
- 5 10. Method according to any of the preceding claims, characterised in that said pulp is CTMP, CMP, TMP or HTCTMP.
 - 11. Method according to any of the preceding claims, characterised in that said produced mechanical pulp is used in the production of paperboard, preferably paperboard intended for food or liquid related applications.
 - 12. Mechanical pulp from a cellulose containing material, characterised in that it is produced according to any of claims 1-11.
- 13. Paperboard, at least partly produced from a mechanical pulp from a cellulose containing material, characterised in that said pulp is produced according to any of claims 1-11.

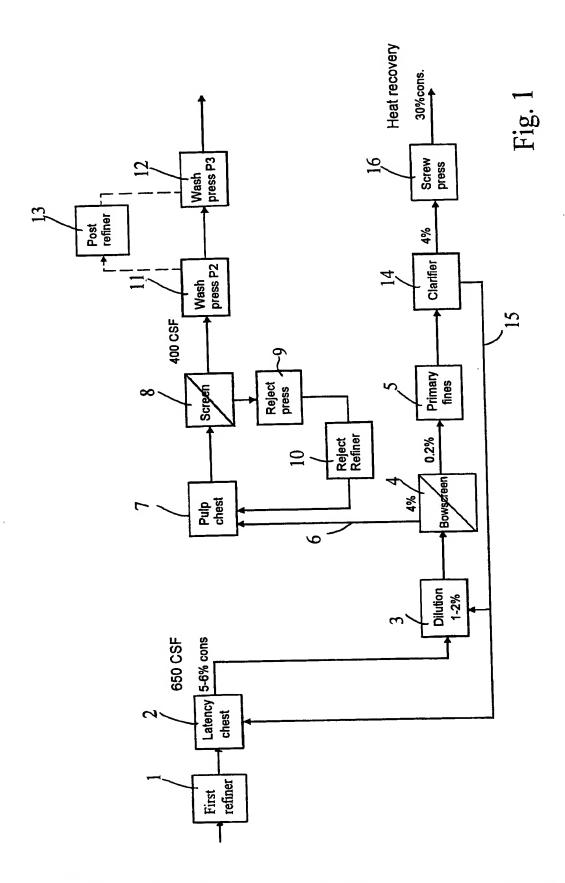

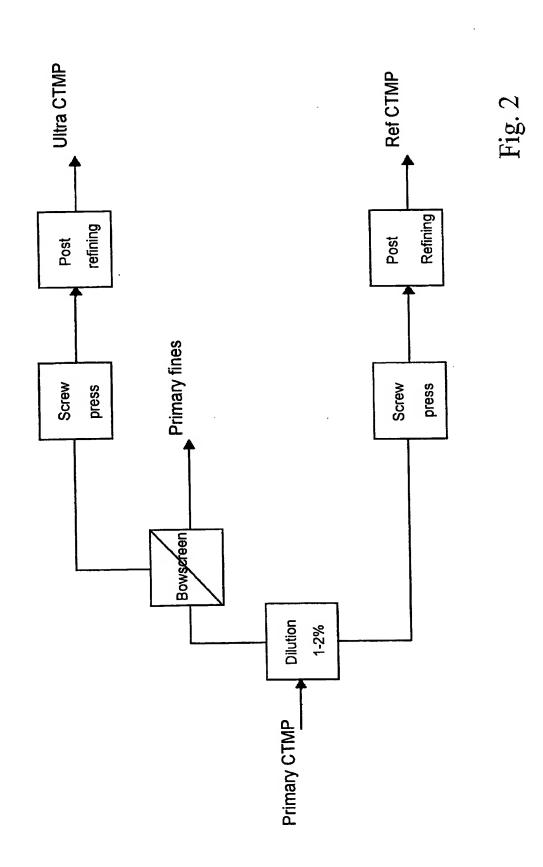

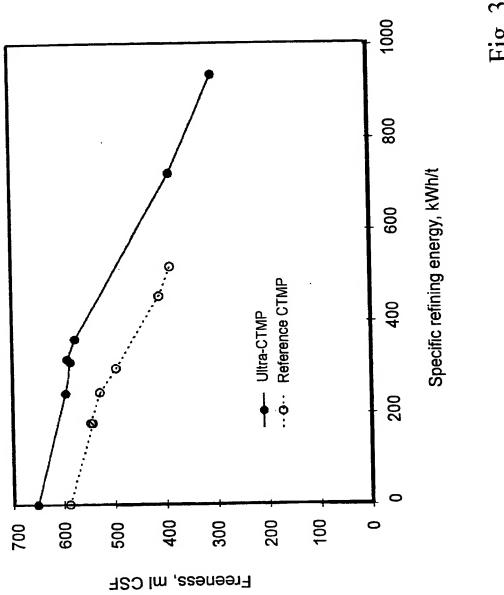



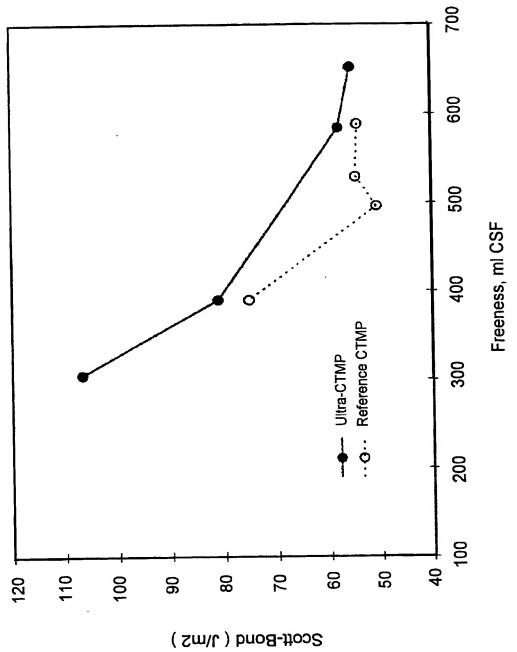




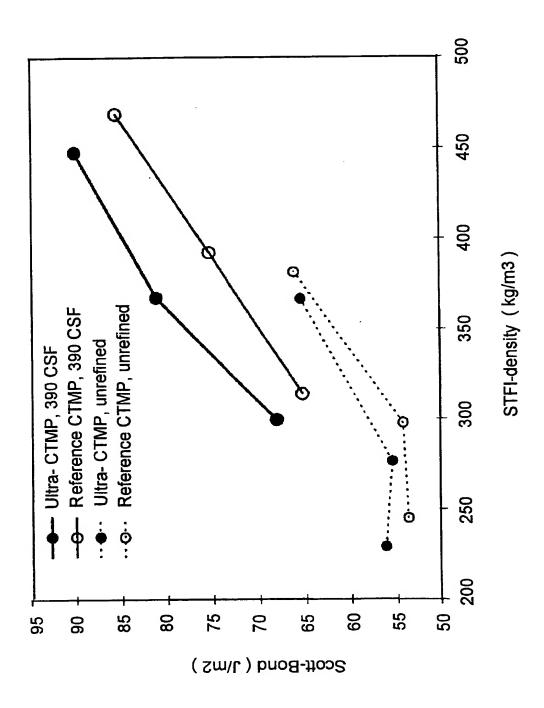


Fig. 5



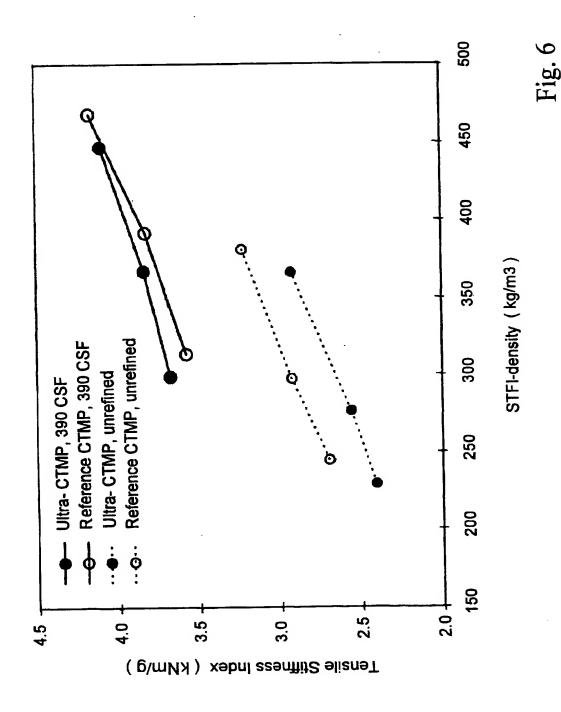

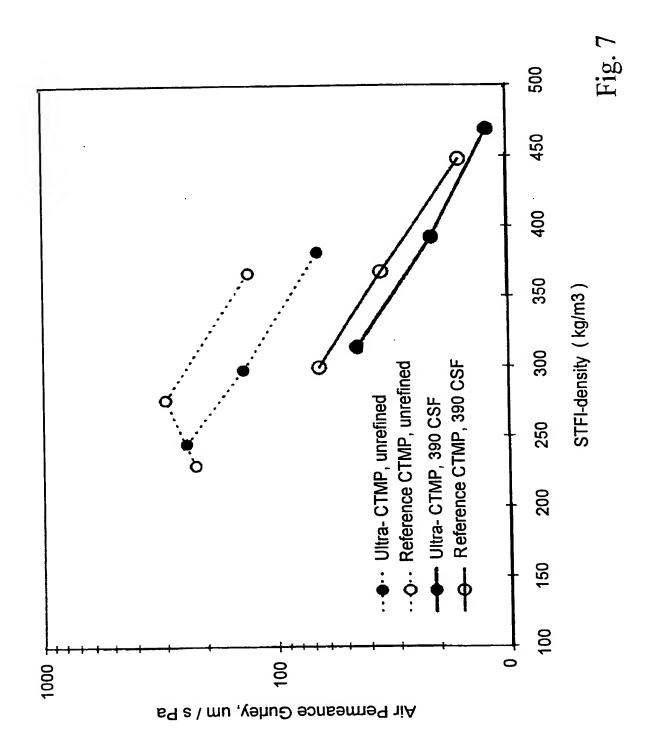

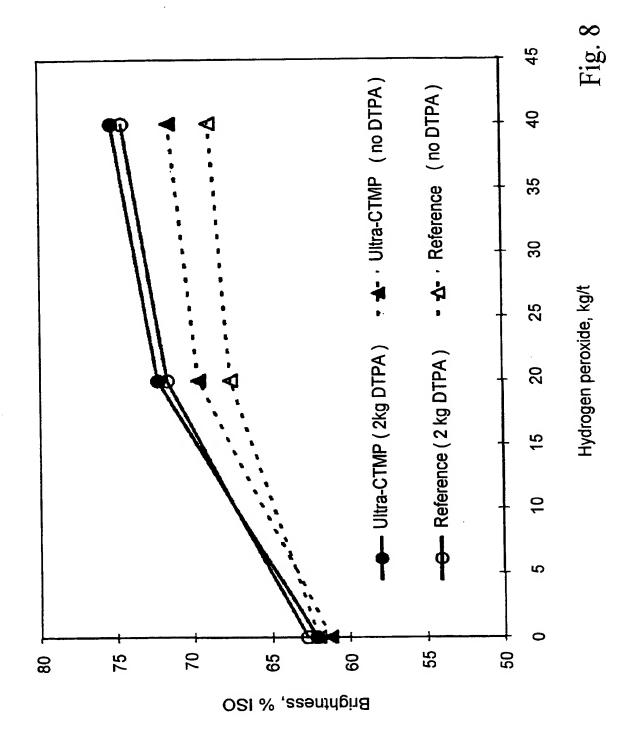

International application No.

PCT/SE 00/01709

A CLASSICATION OF SUBJECT MATTER		
A. CLASSIFICATION OF SUBJECT MATTER		
IPC7: D21B 1/14		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC7: D21B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONCIDEDED TO BE BELEVANT		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category* Citation of document, with indication, where app	ropriate, of the relevant passages	Relevant to claim No.
	US 4731160 A (J. ROBERT PROUGH ET AL),	
	15 March 1988 (15.03.88), column 1, line 55 - line 60, claim 1	
Time 33 Time 60, Claim 1		
Further documents are listed in the continuation of Box C. X See patent family annex.		
* Special categories of cited documents: "T" later document published after the international filing date or priority		
document defining the general state of the art which is not considered date and not in conflict with the application but cited to understand to be of particular relevance the principle or theory underlying the invention		
"E" earlier application or patent but published on or after the international filing date	ntional "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive	
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other	ument which may throw doubts on priority claim(s) or which is step when the document is taken alone 1 to establish the publication date of another citation or other	
special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other	special reason (as specified) "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is	
means "P" document published prior to the international filing date but later than	being obvious to a person skilled in the art	
the priority date claimed "&" document member of the same patent family		
Date of the actual completion of the international search Date of mailing of the international search report		
2 3 0001	0 8 -01- 2001	
2 January 2001 Name and mailing address of the ISA/	Authorized officer	
Swedish Patent Office		
DX 5055, S-102 42 STOCKHOLM Wiva Asplund/MP		



International application No.

PCT/SE 00/01709 04/12/00

Publication date Patent document cited in search report Patent family member(s) Publication date US 4731160 A NONE 15/03/88